

Roller conveyor H 300mm for one pallet place by Gipo

Product specifications

- Working width $S=900$ mm
- Length $L=1400$ mm
- Height $H=300$ mm
- Spacing of rollers in axis $CC=198$ mm
- Roller diameter $\phi 80$, galvanizing,
- Transmission chain 10 B1
- Speed of conveyor 10 m/min
- Motor power 0,37 kW
- Maximum pallet load 800kg



UNLIMITED INNOVATION



Powered roller conveyors are safe and speed up the loading and unloading of goods. The simple and best solution for material handling



Safety plates

Safety and walking plates can easily be mounted without any screws.




Sensor mounting

Sensors and photocells can be mounted without any drilling and threading.



Cable trays can be easy mounted without drilling and threading.

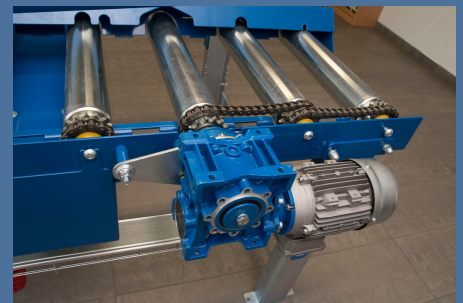

Motor on the side

Direct drive on one of the rollers.



Motor under the conveyor

Drive motor SEW placed under the conveyor.



Service After loosen of two screws and removing the cover, there is a full access for maintenance.



Height adjustment

Hidden easy height adjustment.



UNLIMITED INNOVATION

E-mail: contact@gipo.eu

Phone: +48 94 340 09 09

GIPO Sp. z o.o.

ul. Bohaterów Warszawy 35

75-211 Koszalin

Poland

VAT: PL 669 24 27 455